



Easidew

On-line Hygrometer



An economical panel- or bench- mounting hygrometer with digital display, analogue and digital outputs, and dual alarm feature, offering excellent reliability and repeatability



*Easidew
On-line*

Features

- Calibrated -100 to +20 °C dp
- 2 user selectable alarms
- Large red LED display
- Digital and analogue outputs
- 1/8 DIN panel mounting
- Cable length up to 800 m
- °C or °F dewpoint or ppm(v) displayed
- Universal power supply

Affordable, Simple Dew Point Measurement

The Easidew On-line Hygrometer has been designed to make continuous measurement of the dew point in air and gases simple and reliable. The neat 1/8 DIN display unit is connected to the Easidew Transmitter sensor module, which may be permanently installed in a plant or process location at a distance of up to 800 m from the display. An analogue output is provided for re-transmission to a chart recorder or data-logger and two alarm relays, adjustable via the front panel touch switches, providing control outputs.

Advanced Technology

The key to the Easidew Transmitter's performance is its sensor technology. Michell's Advanced Ceramic Moisture Sensor is coupled with the latest microprocessor based measurement circuitry to produce a fully calibrated and interchangeable sensor transmitter. All calibration data is stored within the transmitter's flash memory and so calibration exchange or service can be effected in seconds, even by untrained personnel. The Easidew Transmitter is simply disconnected, removed from its sampling block and replaced by a new, fully calibrated unit. Furthermore, the Easidew Transmitter forms the front-end of both the Easidew On-Line and Portable Hygrometers. Total flexibility, interchangeability and ease of implementation.

Continuous In-Process Measurement

Easidew On-line is designed to give you continuous, reliable measurement of your air or gas system. The Easidew Transmitter puts intelligent dew-point control right at the measurement point, transmitting calibrated data back to the monitor unit, which can be located anywhere up to 800 m away. Thus, you can be sure that the Easidew On-line Hygrometer will always be giving you vital, real-time information on the quality of air from your dryer system, or the gas in your process line. Easidew On-line's sensor can operate at any pressure up to 40 MPa (400 Barg) when used with its stainless steel sampling block, supplied as standard. The Easidew On-line can also be used with the Easidew Sampler (see Easidew Sampler datasheet). The Sampler is a self-contained sampling system providing filtration and flow control for either pressure or atmospheric

Measurement in Your Control

The Easidew On-line Hygrometer features an extremely clear and bright 20 mm red LED display, so you can easily see the dew point of your process even in poor light conditions. We also provide you with a 4-20 mA analogue or RS232 digital output for connection to a chart recorder, data-logger or computer system, so you can analyse trends in dew point over time. In addition, the Easidew On-line includes 2 alarms that can be easily configured by the user. Each of these alarms has a relay contact. This feature makes the Easidew On-line ideal for the monitoring and control of desiccant dryers or other critical applications.

Practical Design

The Easidew On-line Hygrometer is a compact hygrometer, with a standard 1/8 DIN layout (96 x 48 mm) requiring clearance depth of only 85 mm. Front panel buttons for alarm setting are protected to IP65 and NEMA 12.



The Dew Point Specialists



Rugged yet Lightweight Sensor

The Easidew Transmitter is constructed in 316 grade stainless steel, with a captive sealed, glanded cable connector and offers IP66 and NEMA 4 protection from the environment. This rugged construction makes it perfectly suited for industrial applications whilst, weighing only 150 g, it is light enough to be supported directly by its connection to a 6 mm or ¼ inch sample pipe without any additional mounting brackets. Again, design for operation is a key benefit.

Reproducibility and Calibration Integrity

It is vital that the dew-point measurements you make are accurate and reliable. For over thirty years we have continually developed and refined our sensor technology to ensure that every sensor performs to your expectations. Each Ceramic Moisture Sensor goes through a multi-mode test and inspection process before calibration to verify it's reliability. The calibration process itself takes more than one week, where rigorous checks on the sensor performance are carried out at thirteen points across the measurement range. Only when the sensor has passed all these stringent checks is it ready to be applied to your critical process control application.


Traceable Calibration

Each Easidew On-line is supplied with a calibration certificate traceable to national standards from Michell Instruments UKAS accredited laboratory

Technical Specifications

Measurement Range	-100 to +20 °C dew point -148 to +68 °F dew point ppm(v) 0 - 3000
Accuracy	±2 °C dew point
Operating Temp	Electronics: -5 to +50 °C Sensor: -40 to +60 °C
Storage Temperature	-40 to +75 °C
Output	4-20 or 0-20 mA signal, max load resistance 500 W RS232
Alarm	2 volt free contacts, 3A @ 240 VAC
User interface	Front panel configuration of alarm points
Power Supply	85 to 264 VAC, 50/60 Hz
Ingress protection	
Monitor	IP65 and NEMA 12 front panel only
Sensor	IP66 / NEMA 4
Sensor Cable	0.8 m supplied as standard (max 800 m)
Mains Cable	2 m cable supplied
Dimensions	Monitor: 1/8 DIN case, 96 x 48 x 85 mm including clearance (W x H x D) Sensor: 132 x 27A/F mm (length x diameter across hex flats)
Sensor	For full specification please see the Easidew Transmitter datasheet
Options:	
	Easidew Sampler - A self-contained sampling system, with filtration and flow control, for measurement of pressure or atmospheric dewpoint - Part number 9990278
	Sample Block - Stainless Steel sample block to contain Easidew Transmitter, with 1/8" NPT ports - Part number - 9960665
	Replacement HDPE Guard - Pack of 10 HDPE Guards - Part number - EA2-HDPE-10
	Sintered Guard - Stainless Steel sintered guard, for protection of ceramic sensor (in place of standard HDPE Guard) - Part number 9980237

Dimensions

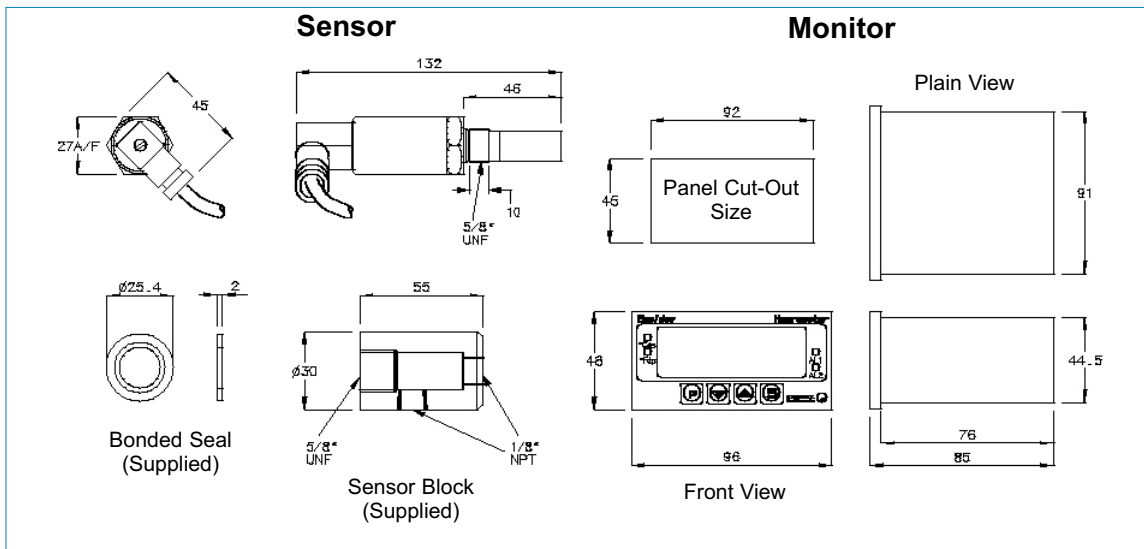

Dimensions mm

Michell Instruments Ltd
 Nuffield Close, Cambridge CB4 1SS UK
 Tel: +44 (0)1223 434800 Fax: +44 (0)1223 434895
 e-mail: info@michell.co.uk
 www.michell-instruments.com



The Dew Point Specialists

