



## Ankersmid stationary system Series ASS

### Application

The stationary gas conditioning system **ASS** has been designed so that detailed gas analyses can be carried out at any time and in any place.

The entire gas conditioning system is installed on a mounting plate which ensures that the components can be removed easily and gas analyses carried out quickly, safely and with minimum maintenance.

### Description

The stationary system is suitable for variable, discontinuous and continuous operation. The components built into the system can be used for standard applications. For special requirements please ask us for other solutions.

The heated sample line is to be mounted at the gas measuring inlet terminal.

A ball-valve can be fitted to the inlet terminal of the stationary system in order to calibrate analyser(s) with check gas.

The amount of flow is determined by a sample gas diaphragm pump.

The sample gas pump AMP 11P is activated automatically by means of an excess temperature contact on the cooler.

Optional flow meters with integrated needle valve are available.

The flow meters are built-in as the electronic controller. This unique microprocessor controlled Peltier cooler is a powerful designed dew point stabiliser. The dew point is set at 4°C but can be changed at any value between 1°C and 15°C. The gas cooler is equipped with a heat exchanger made of glass and PTFE. Heat exchanger made of full PTFE or stainless steel are also available.

A preliminary fine filter (**AUF**) is installed at the inlet of the gas sampling pump and can be equipped with a variety range of filter elements in different materials and porosities.

Any condensation is continually removed by a peristaltic pump. (type **ACP ASR25**).




- **Low maintenance and self-monitoring**
- **Dew point +4°C ± 0,1°C**
- **Ready for use < 15 min**
- **Compact design**
- **Optimum reliability**
- **Easy to mount**
- **Universally equipped**
- **Good chemical resistance**



## Ankersmid stationary system

### ASS

#### Dimensions

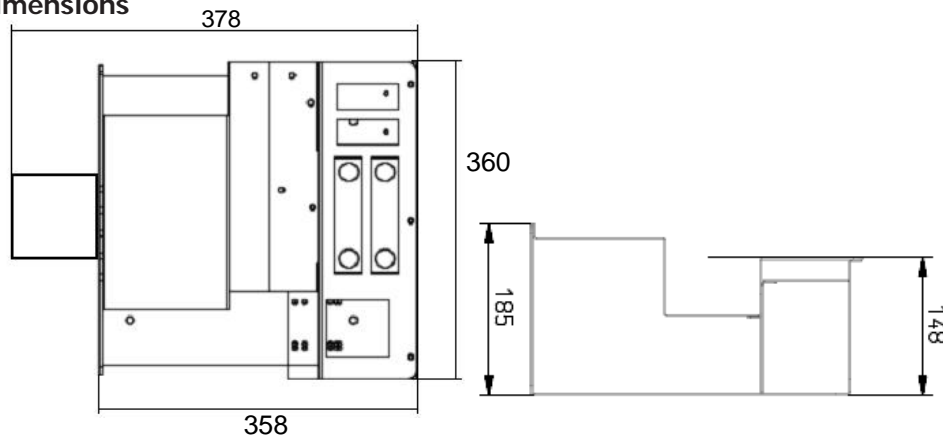

#### Technical data

APS Portable system	ASS 301	ASS 302	ASS 303	ASS 311	ASS 312	ASS 313
<b>Gas flow rate max.</b>	350NI/h	350NI/h	350NI/h	200NI/h	200NI/h	200NI/h
<b>Sample outlet dew point</b>	+1°C ..... +15°C, factory setting: +4°C					
<b>Dew point stability</b>	±0,1°C					
<b>Sample inlet temperature</b>	Max. 190°C					
<b>Sample inlet connection</b>	Stainless steel connection DN4/6mm, suitable for heated sample lines					
<b>Sample inlet dew point</b>	Max. 80°C					
<b>Ambient temperature</b>	+5°C up to +45°C					
<b>Maximum pressure</b>	3 bar abs.					
<b>Material of gas wetted parts*</b>						
<b>Heat exchanger head</b>	PTFE	PVDF	SS316	PTFE	PVDF	SS316
<b>Heat exchanger body</b>	Glass	PVDF	SS316	Glass	PVDF	SS316
<b>Diaphragm pump</b>	AMP 11P: Head: PPS, Valves: FFPM, Membrane: PTFE-coated					
<b>Filter</b>	head, filter element, element holder: PTFE, body: glass					
<b>Peristaltic pump</b>	Tube: Novoprene®, Connectors: PVDF					
<b>Others</b>	Tubing: PTFE, Inlet connector: SS316, Outlet connector: PVDF					
<b>Number of gas inlets</b>	1					
<b>Number of gas outlets</b>	1 (standard), max. 2					
<b>Filter porosity*</b>	2µm					
<b>Alarm contact</b>	Free programmable contact 1NO / 1NC, rating: 250V, 16A AC					
<b>Total cooling capacity</b>	53W (Peltier element)					
<b>Storage temperature</b>	-25 °C up to +65 °C					
<b>Ready for operation</b>	< 15 min					
<b>Power supply</b>	230V/50Hz or 115V/60Hz					
<b>Power consumption</b>	100VA					
<b>Dimensions</b>	500mm x 400mm x 200mm (W x H x D)					
<b>Electrical connection</b>	Cold appliance plug with 1,5 m of cable					
<b>Electrical protection</b>	Fuse 2A					
<b>Electrical equipment standard</b>	EN61010					

Maximum values in technical data's must be rated in consideration of total cooling capacity at 25°C ambient temperature and 5°C outlet dew point

PTFE = Polytetrafluoroethylene (Teflon®)

PVDF = Polyvinylidenfluoride

FFPM = Perfluorelastomer (Kalrez®)

PPS = Polypropylenesulphide (Ryton®)

\* Other versions on request